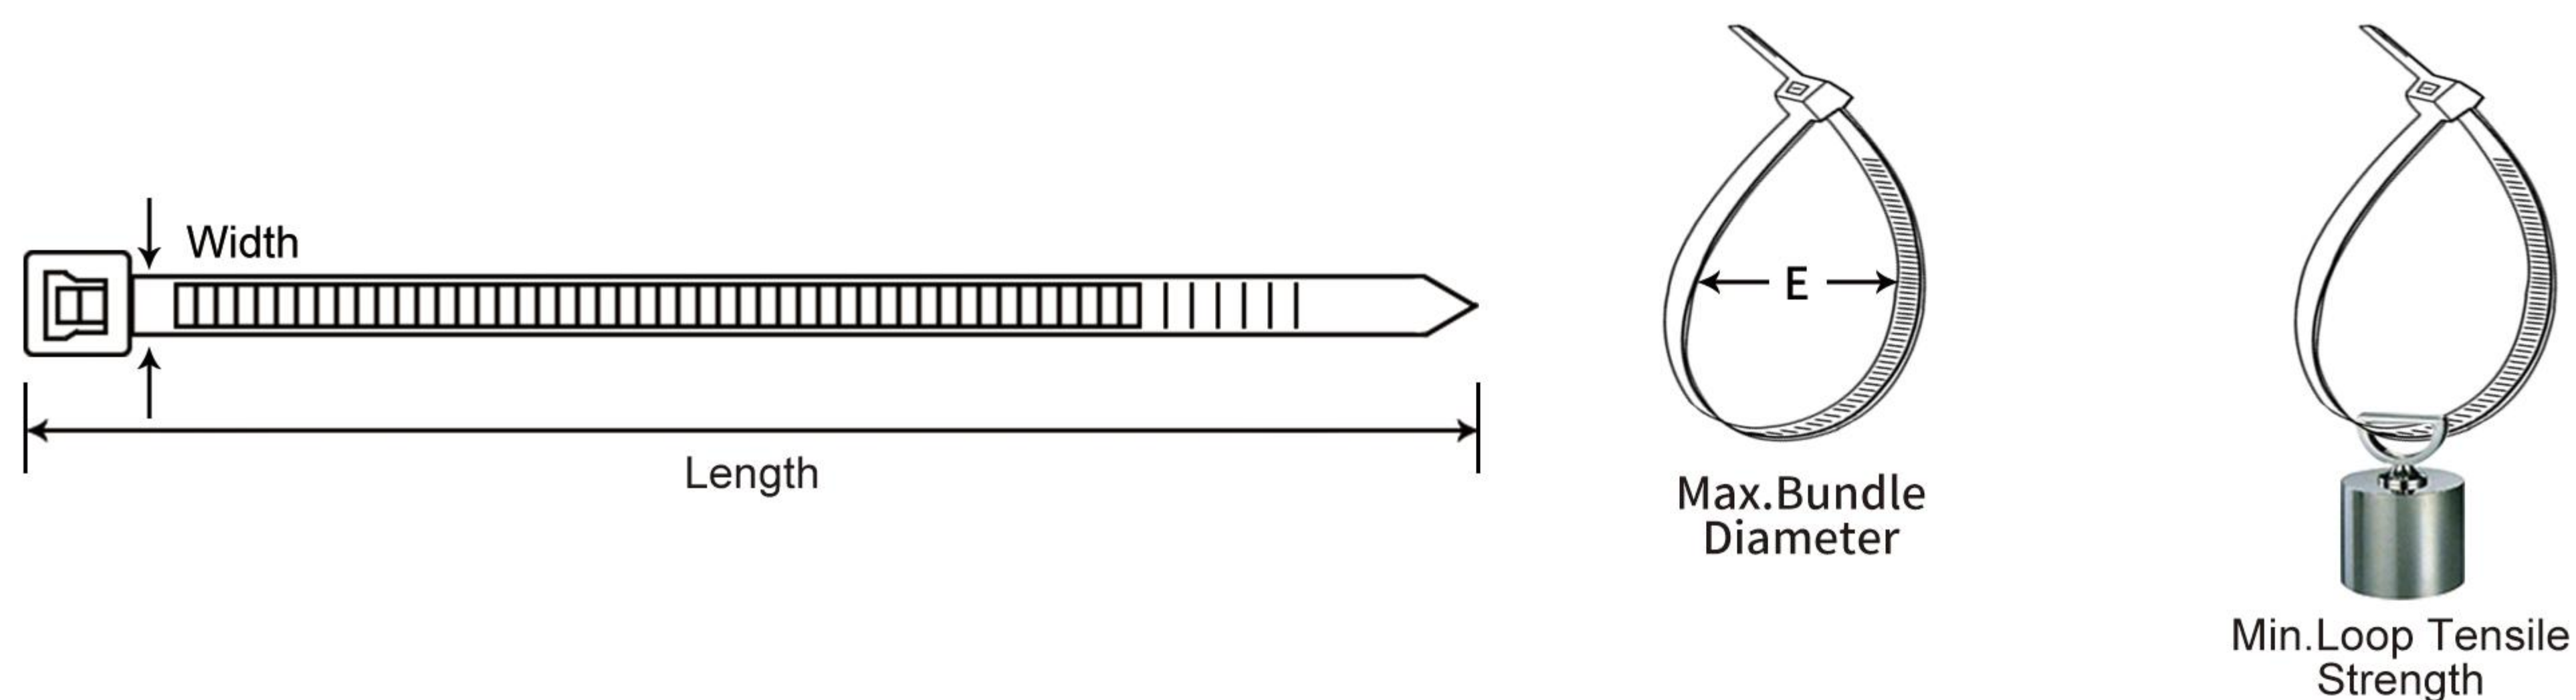




常规尼龙扎带 Standard Cable Ties

- 1、Features: Eco-friendly, Strong tensile strength, Anti-Acid, Anti-erosion, not easy to aging. Cable ties with special materials can be customized, which have better performance such as high and low temperature resistance, UV resistance, flammability, etc.
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：产品环保，抗拉强度高、耐酸、耐腐蚀、不易老化。可定制特殊材料生产的扎带，耐高低温、抗紫外线、阻燃等性能更优异。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度： -20°C 至 85°C 。
- 5、工作温度： -40°C 至 85°C 。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。



Various colors



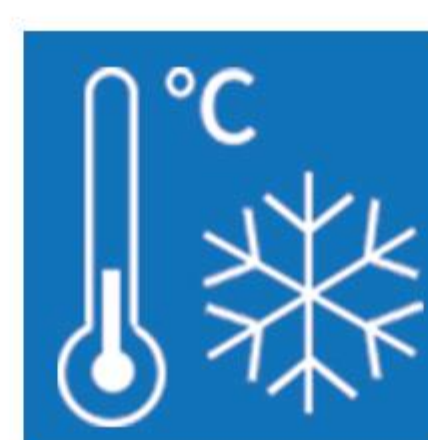
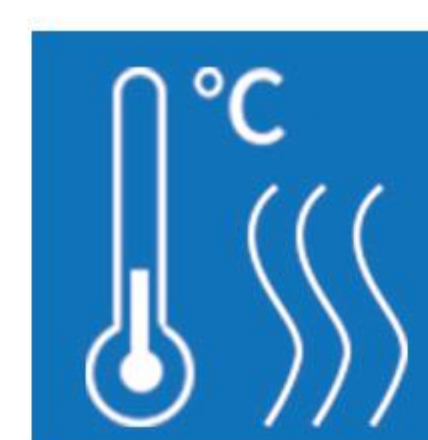
Halogen Free



Corrosion resistant

Flame retardant
94V-2

High tensile strength

Low temperature
resistantHigh temperature
resistant

UV resistant



Non-magnetic



Item No.	Width(W)		Min. Loop Tensile Strength		Length(L)		Max. Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NL-3x80	2.5	0.1	18	8	80	3.1	16	0.63
NL-3x100					100	4	22	0.87
NL-3x120					120	4.7	30	1.18
NL-3x150					150	6	35	1.38
NL-3x200					200	8	53	2.09
NL-4x100	3.6	0.14	40	18	100	4	22	0.87
NL-4x120					120	4.7	30	1.18
NL-4x150					150	6	35	1.38
NL-4x200					200	8	53	2.09
NL-4x250					250	9.8	65	2.56
NL-4x300					300	11.8	80	3.15
NL-4x350					350	13.8	93	3.66
NL-4x370					370	14.6	102	4.02
NL-4x400					400	15.7	108	4.25
NL-4x450					450	17.7	124	4.88
NL-4x500					500	19.7	138	5.43
NL-5x150	4.6	0.18	50	22	150	6	35	1.38
NL-5x200	4.8	0.19	55	25	200	8	53	2.09
NL-5x250					250	9.8	65	2.56
NL-5x300					300	11.8	80	3.15
NL-5x350					350	13.8	93	3.66
NL-5x380					380	15	102	4.02
NL-5x400					400	15.7	108	4.25
NL-5x450					450	17.7	124	4.88
NL-5x500					500	19.7	138	5.43
NL-5x550					550	21.7	154	6.06
NL-5x650					650	25.6	188	7.4
NL-8x150	7.6	0.3	120	55	150	6	36	1.42
NL-8x200					200	8	53	2.09
NL-8x250					250	9.8	65	2.56
NL-8x300					300	11.8	80	3.15
NL-8x350					350	13.8	93	3.66
NL-8x380					380	15	102	4.02
NL-8x400					400	15.7	108	4.25
NL-8x450					450	17.7	124	4.88
NL-8x500					500	19.7	138	5.43
NL-8x550					550	21.7	154	6.06
NL-8x600					600	23.6	172	6.77
NL-8x650					650	25.6	188	7.4
NL-8x700					700	27.6	205	8.07
NL-8x750					750	29.5	222	8.74
NL-8x800					800	31.5	234	9.21
NL-10x400	9	0.35	175	80	400	15.7	108	4.25
NL-10x450					450	17.7	124	4.88
NL-10x500					500	19.7	138	5.43
NL-10x550					550	21.7	154	6.06
NL-10x600					600	23.6	172	6.77
NL-10x650					650	25.6	188	7.4
NL-10x700					720	28.3	205	8.07
NL-10x750					760	30	222	8.74
NL-10x800					800	31.5	234	9.21
NL-10x920					920	36.2	275	10.83
NL-10x1000					1000	39.4	292	11.5
NL-10x1200					1200	47.2	340	13.39
NL-10x1350					1350	53.1	380	14.96
NL-10x1500					1500	59.1	430	16.93
NL-12x300	12	0.47	250	114	300	11.8	80	3.15
NL-12x400					400	15.7	108	4.25
NL-12x500					500	19.7	138	5.43
NL-12x600					600	23.6	172	6.77
NL-12x650					650	25.6	188	7.4
NL-12x800					800	31.5	234	9.21
NL-12x900					900	35.4	268	10.55
NL-12x1000					1000	39.4	292	11.5

Item No.	Width(W)		Min. Loop Tensile Strength		Length(L)		Max. Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NL-3x80S	1.9	0.07	11	5	80	3.1	16	0.63
NL-3x100S					100	4	22	0.87
NL-3x120S					120	4.7	30	1.18
NL-3x150S					150	6	35	1.38
NL-3x200S					200	8	53	2.09
NL-4x150S	2.7	0.11	22	10	150	6	35	1.38
NL-4x200S					200	8	53	2.09
NL-4x250S					250	9.8	65	2.56
NL-4x300S					300	11.8	80	3.15
NL-4x150M	3.0	0.1	30	14	150	6	35	1.38
NL-4x200M					200	8	53	2.09
NL-4x250M					250	9.8	65	2.56
NL-4x300M					300	11.8	80	3.15
NL-5x380M	4.3	0.17	44	20	380	15	102	4.02
NL-8x200S	5.2	0.2	75	35	200	8	53	2.09
NL-8x250S					250	9.8	65	2.56
NL-8x300S					300	11.8	80	3.15
NL-8x350S					350	13.8	93	3.66
NL-8x400S					400	15.7	108	4.25
NL-8x450S					450	17.7	124	4.88
NL-8x500S					500	19.7	138	5.43
NL-8x200M	5.8	0.23	88	40	200	8	53	2.09
NL-8x250M					250	9.8	65	2.56
NL-8x300M					300	11.8	80	3.15
NL-8x350M					350	13.8	93	3.66
NL-8x400M					400	15.7	108	4.25
NL-8x450M					450	17.7	124	4.88
NL-8x500M					500	19.7	138	5.43
NL-10x650S	7.2	0.28	110	50	650	25.6	188	7.4